


LIEKKI® Er40-4/125 fiber is a highly doped erbium fiber designed for C- and L-band amplifiers, and ASE sources. Due to the high absorption level this fiber is particularly suited for L-band applications.

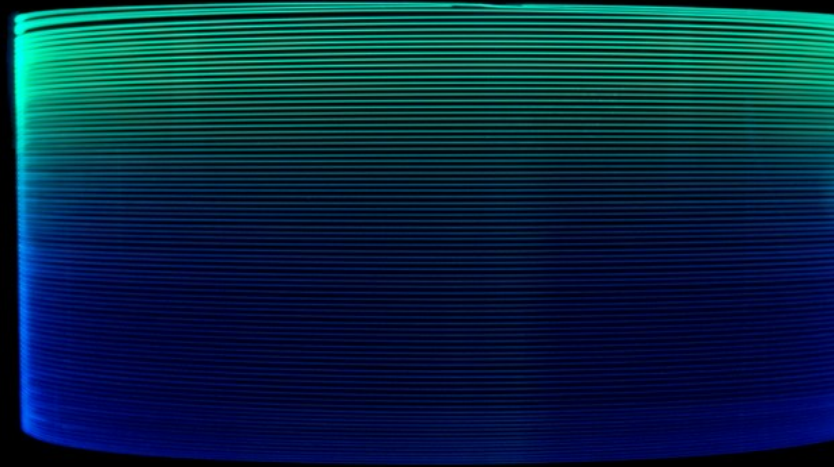

Features

- Excellent batch consistency of erbium peak absorption and spectral shape
- Very short application length reduces non-linear effects like FWM, SRS and SBS
- Wide and flat spectrum
- Low polarization mode dispersion, typical value <25 fs/m
- Dual layer UV-cured acrylate coating
- Suitable for both 980 nm and 1480 nm pumping
- Telecom-like geometry with good spliceability to standard single mode fibers
- Telcordia GR-1312-CORE Generic Requirements qualified

Applications

- L-band DWDM
- L-band ASE sources
- Low non-linearity applications
- LIDAR

Typical Fiber Specifications

Fiber		LIEKKI® Er40-4/125
Optical	Units	
Mode Field Diameter at 1550 nm	μm	6.5 ± 0.5
Peak Core Absorption at 1530 nm	dB/m	40.0 ± 4.0
Core Numerical Aperture (nominal)		0.2
Cut-off Wavelength	nm	890 ± 90
Geometrical and mechanical		
Core Concentricity Error, ≤	μm	0.7
Cladding Diameter (flat-to-flat)	μm	125 ± 2
Cladding Geometry		Round
Coating Diameter		245 ± 15
Coating Material		Dual coated high index acrylate
Proof Test, ≥	kpsi	100