


LIEKKI® Er80-4/125-HD-PM fiber is a highly doped, polarization-maintaining erbium fiber designed for fiber lasers. The core refractive index profile is tailored for normal dispersion higher than standard step-index fibers. The high Erbium concentration provides a strong gain and reduces the required application length for minimal non-linear effects. This makes this fiber particularly suitable for ultra-short pulse applications.

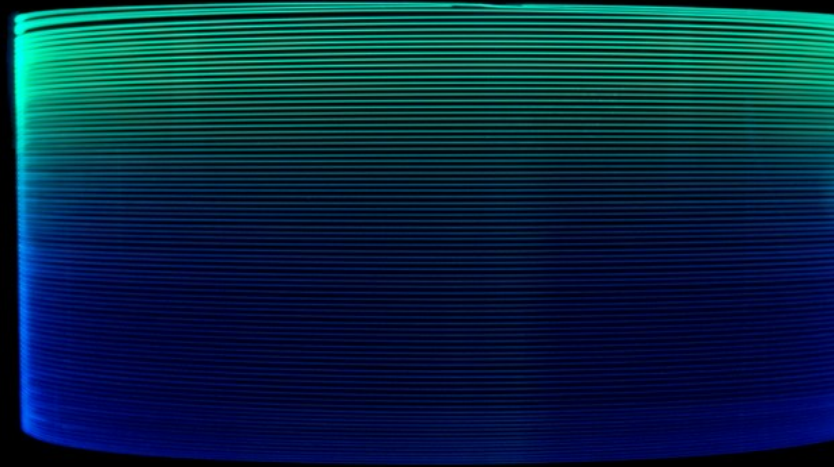

## Features

- High Erbium concentration for reduced non-linear effects.
- Tailored core refractive index for high normal dispersion
- Polarization maintaining fiber
- Suitable for both 980 nm and 1480 nm pumping
- Dual layer UV-cured acrylate coating

## Applications

- Ultra-short pulse (femtosecond) amplifiers and lasers
- Low non-linearity applications

## Typical Fiber Specifications

Fiber		LIEKKI® Er80-4/125-HD-PM
Optical	Units	
Mode Field Diameter at 1550 nm	μm	6.5 ± 1.0
Peak Core Absorption at 1530 nm	dB/m	80.0 ± 20.0
Core Numerical Aperture (nominal)		0.2
Cut-off Wavelength	nm	890 ± 90
Dispersion parameter at 1550 nm (nominal) <sup>1</sup>	ps/(nm*km)	- 22
Birefringence, ≥	1E-04	1.0
Geometrical and mechanical		
Core Concentricity Error, ≤	μm	0.7
Cladding Diameter (flat-to-flat)	μm	125 ± 2
Cladding Geometry		Round, panda
Coating Diameter		245 ± 15
Coating Material		Dual coated high index acrylate
Proof Test, ≥	kpsi	100

<sup>1</sup> Actual dispersion in fiber might slightly vary depending on core diameter, refractive index profile and Erbium ion inversion level.