


Item Number **1038928**  
 Item Description **e06-06-058-0915-5-105-0.22-SI-FPT-1.5-HT**  
 Model **e06.0580915105**

EAR99<sup>5</sup>

	Units	Lower Spec	Typical	Upper Spec
<b>Optical</b>				
CW Output Power (with fresnel loss) <sup>6</sup>	W	54	60	
CW Output Power (without fresnel loss)	W		62	
Centroid Wavelength	nm	910.0	915.0	920.0
Spectral Width (FWHM)	nm		3.9	7.0
Power within 0.15 NA	%	90		
Fiber Core / Clad Diameter	µm		105 / 125	
Fiber NA / Index Type	-		0.22 NA / Step Index	
<b>Electrical</b>				
Electrical-to-Optical Efficiency	%	43	47	
Threshold Current	A		0.4	
Operating Current	A		12.0	12.0
Operating Voltage	V		10.6	11.0
<b>Mechanical</b>				
Mass	g		85	
Fiber Length	m	1.0	1.5	
Active Fiber Bend Radius	mm	25		
Fiber Jacketing	-		900 um Hytrel Loose Tube Buffer	
Fiber Termination	-		FPT	
<b>Thermal</b>				
Thermal Resistance	°C / W		0.6	
Waste Heat	W		67	
Operating (Housing) Temperature <sup>2,3</sup>	°C	+20	+25	+35
Wavelength Temperature Coefficient	nm / °C		0.32	
Wavelength Current Coefficient	nm / A		1.1	


**Outline Drawing (Package Dimension 46 x 45 x 11.1 mm)**

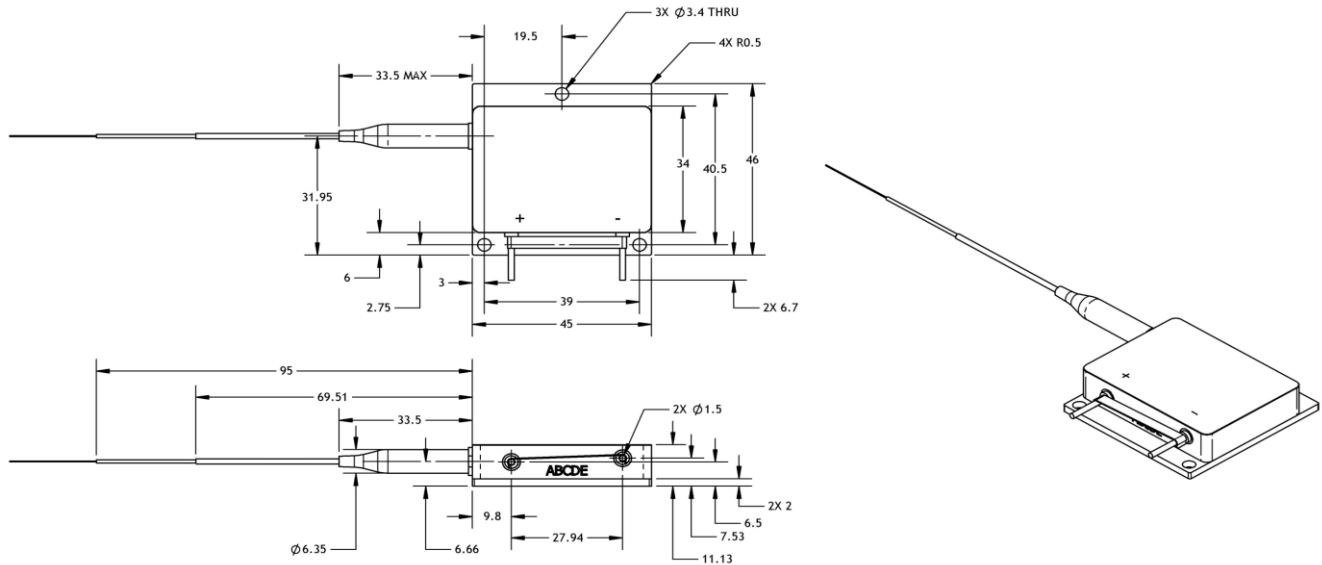

**Notes**

- <sup>1</sup> Production specification shown are for beginning of life performance, end of life operating current (Iop) is 120% beginning of life Iop
- <sup>2</sup> A non-condensing environment is required for operation and storage. Storage conditions are from -20 to +70 °C with relative humidity between 5 to 85 %
- <sup>3</sup> Operating temperature defined by the package housing
- <sup>4</sup> Current phase within the nLIGHT's NPI (New Production Introduction) Process
- <sup>5</sup> Export Control Classification Number (ECCN) as defined by the Export Administration Regulations (EAR)
- <sup>6</sup> Reported power is with an uncoated distal fiber end, therefore will be ~ 3.5 % higher if spliced

**IEC Regulation**  
 This laser does NOT comply with IEC 60825-1 or 21 CFR 1040 for complete laser products and is solely intended to be integrated in a certified laser product.



**Notice**  
 nLIGHT continually improves its products to provide customers with outstanding quality and reliability, therefore may change certain specifications and product descriptions at any time, without notice. Additionally, nLIGHT offers a limited warranty to ensure customer satisfaction. For complete details, please contact an nLIGHT sales representative.



nLight Corporation  
 5408 NE 88th Street, Bldg E  
 Vancouver, Washington 98665  
 United States of America  
 Phone: 866.202.4488  
 360.566.4460  
 Fax: 360.546.1960  
 e-mail: sales@nlight.net  
 web: www.nlight.net