


Item Number 1038927
 Item Description n3-015-0808-3-200-0.22-SI-SMA-1.5-KL-ST
 Model n3.0150808200

Design Validation (Beta)⁴
 EAR99⁵

	Units	Lower Spec	Typical	Upper Spec
Optical				
CW Output Power	W		15	
Centroid Wavelength	nm	805	808	811
Spectral Width (FWHM)	nm		2.0	4.0
Slope Efficiency	W / A		3.0	
Power within 0.17 NA	%	90		
Fiber Core / Clad Diameter	µm		200 / 220	
Fiber NA / Index Type	-		0.22 NA / Step Index	
Electrical				
Electrical-to-Optical Efficiency	%	44	47	
Threshold Current	A		1.3	
Operating Current	A		6.1	6.8
Operating Voltage	V		5.1	5.5
Mechanical				
Mass	g		To be verified	
Fiber Length	m	1.0	1.5	
Active Fiber Bend Radius	mm	35		
Fiber Jacketing	-		3 mm Kevlar Strand Furcation Tubing	
Fiber Termination	-		SMA	
Thermal				
Thermal Resistance	°C / W		1.1	
Waste Heat	W		16	
Operating Temperature ^{2,3}	°C	+20	+25	+35
Wavelength Temperature Coefficient	nm / °C		0.28	
Wavelength Current Coefficient	nm / A		0.7	


Outline Drawing

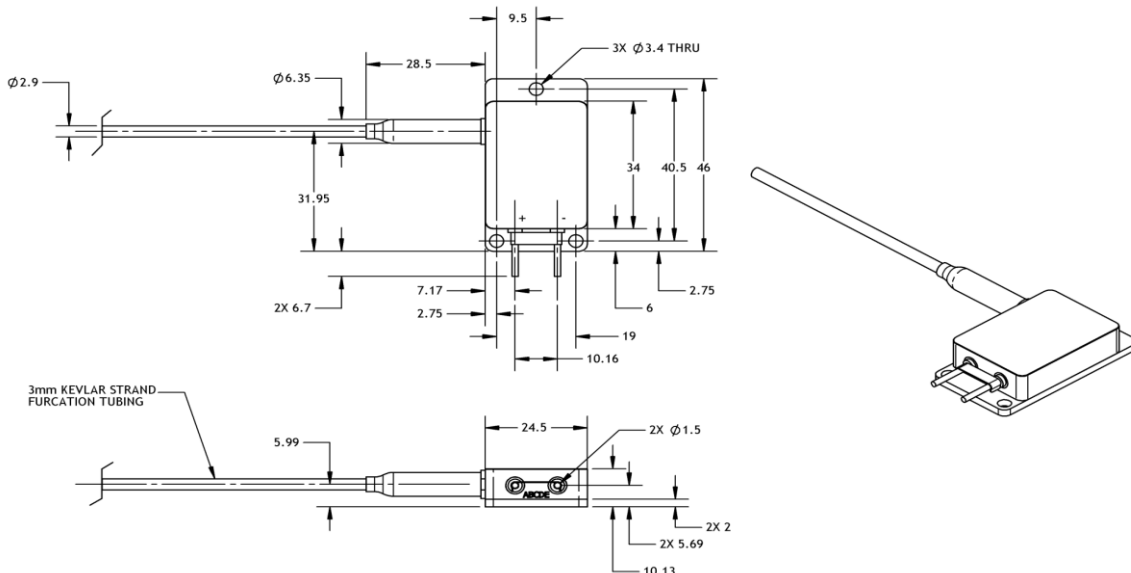

Notes

- ¹ Production specification shown are for beginning of life performance, end of life operating current is 120% beginning of life top
- ² A non-condensing environment is required for operation and storage. Storage conditions are from -20 to +70 °C with relative humidity between 5 to 85 %
- ³ Operating temperature define by the package housing
- ⁴ Current phase within the nLIGHT's NPI (New Production Introduction) Process
- ⁵ Export control classification number as defined by Export Administration Regulations (EAR)

IEC Regulation
 This device does not comply with the International Regulation IEC 60825-1 as administered by the Center for Devices and Radiological Health per Laser Notice No. 50. Purchaser acknowledges that his/her products must comply with these regulations before they can be sold to a customer.



Notice
 nLIGHT continually improves its products to provide customers with outstanding quality and reliability. nLIGHT may change certain specifications and product descriptions at any time, without notice. In addition, nLIGHT offers a limited warranty to ensure customer satisfaction. For complete details, please contact your nLIGHT sales representative.



nLight Corporation
 5408 NE 88th Street, Bldg E
 Vancouver, Washington 98665
 United States of America
 Phone: 866.202.4488
 360.566.4460
 Fax: 360.546.1960
 e-mail: sales@nlight.net
 web: www.nlight.net