


LIEKKI™ Er16-8/125

Large Mode Area Erbium Doped Fiber

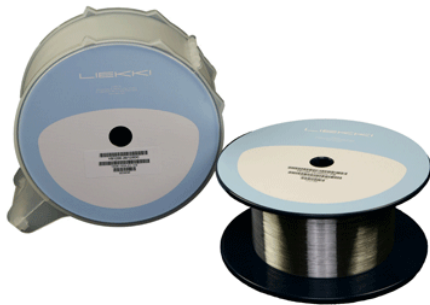

LIEKKI™ Er16-8/125 fibers are large mode area (LMA) erbium doped fibers suitable for medium power output amplifiers.

Good spliceability, excellent power conversion efficiency, and excellent spectral reproducibility and consistency make these fibers the choice for today's medium power output amplifiers used f.ex. in CATV and PON applications.

Applications

- Medium power DWDM, CATV and PON
- Medium power, low non-linearity applications

Features

- Excellent batch consistency of erbium peak absorption and spectral shape
- Good power conversion efficiency for medium power applications
- Wide and flat spectrum
- Low splice loss with single mode and 1060 pigtail fibers
- Splicing parameters available for Ericsson, Fitel and Sumitomo splicers
- Dual layer UV-cured acrylate coating
- Telcordia GR-1312-CORE Generic Requirements qualified
- Suitable for both 980 nm and 1480 nm pumping

Typical device specification

LIEKKI™ Er16-8/125

Optical

Mode field diameter at 1550 nm	µm	9.5 ± 0.8
Peak core absorption at 1530 nm	dB/m	16 ± 2
Core numerical aperture (nominal)		0.13
Cut-off wavelength	nm	1100 - 1400

Geometrical and mechanical

Core concentricity error	µm	< 0.7
Cladding diameter	µm	125 ± 2
Cladding geometry		round
Coating diameter	µm	245 ± 15
Coating material		high index acrylate
Proof test	%	> 1

Notice

nLIGHT continually improves its products to provide its customers with outstanding quality and reliability. nLIGHT may make changes to specifications and product descriptions at any time, without notice. In addition, nLIGHT offers a limited warranty to ensure customer satisfaction. For complete details, please contact your nLIGHT sales representative.