



The Summit™ NL-QD-Q1yzz-L2 Dual Stacked Array packages two conductively cooled diode laser stacks side by side. Each stack is built with up to 6 diode bars (60W QCW to 150W QCW per bar) designed to operate over a broad temperature range.

The diode laser bar array benefits from a fully mastered technology, and is designed for improved efficiency and reliable operation at very high junction temperatures. The packaging and heat exchanger have been optimized to reduce overall thermal resistance. The NL-QD-Q1yzz-L2 stack is ideal for many different applications, such as pumping either rods or slabs in solid-state lasers. Its compact and rugged design allows reliable operation under severe environmental conditions.


Features

- Side by Side Package
- High Efficiency
- Low Thermal Resistance
- Highest Power

Applications

- Target Designation
- Ranging
- LIDAR
- Multi-Spectral Imaging
- Medical

Package Dimensions

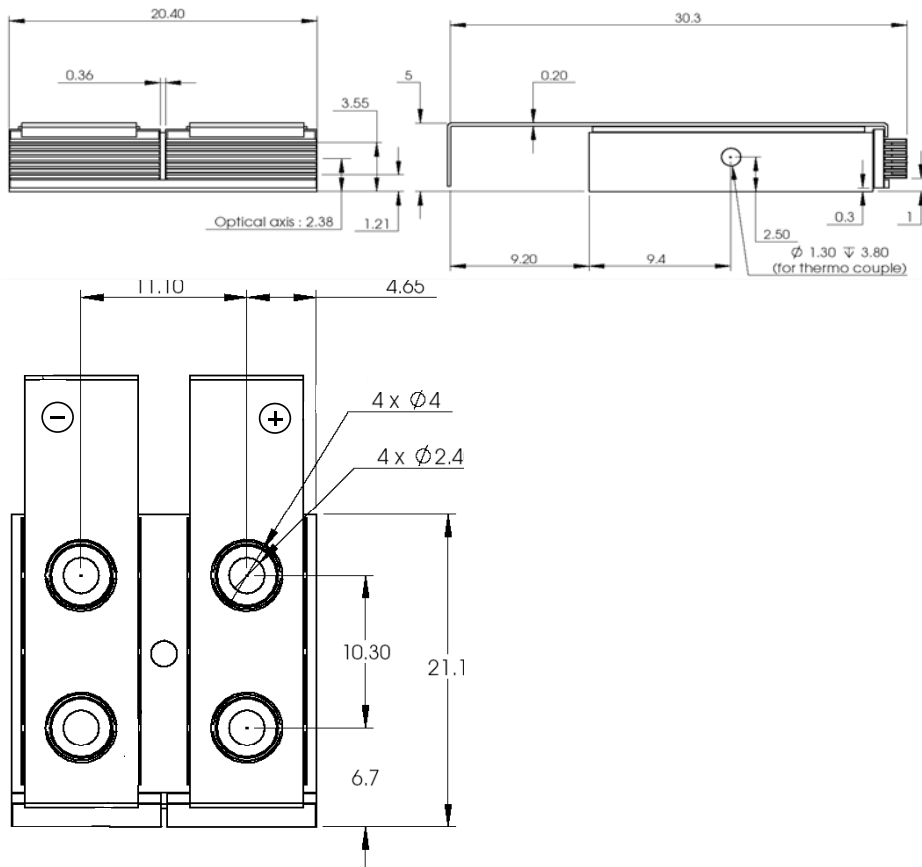

**AVOID EXPOSURE.
LASER RADIATION IS
EMITTED FROM THIS
APERTURE**

Case temperature: +25 °C

Quasi-continuous mode:

pulse width = 200µs
repetition rate = up to 100Hz

Device Specifications	UNITS	NL-QD-Q1yzz-L2					
Parameters							
Number of diode bars per stack		zz = 2 to 6					
Pitch between diode bars	µm	400					
Emitting area	mm x mm	20.4 x 2 (zz=6)					
		y = 2	y = 3	y = 4	y = 5	y = 6	
QCW Optical Power per Diode Bar	Watt	60	80	100	125	150	
Operating current	Typ.	Amp.	66	84	100	120	140
	Max.	Amp.	74	95	115	135	165
Operating voltage	Volt	< 2 / bar			< 2.2 / bar		
Total efficiency	Typ.	%	48	50			54
	Min.	%	42	44			46
Beam divergence (FWHM)	degree	10 x 40					

Note:

Variation of wavelength is approximately 0.26 to 0.3 nm/°C.
 Standard wavelength is 808nm.
 Spectral width is ≤ 4 nm FWHM.
 Tolerance on wavelength is +/- 3nm.
 Other wavelength selections are available.
 Possibility of pitch between diode bars of 500µm.
 Specifications are for nominal lifetime 10⁹ pulses (for 200µs pulse width).
 Operating at higher power or higher temperature will accelerate component aging, increase threshold, current and decrease slope efficiency.

CFR Regulation

These components do not comply with the federal regulation (Title 21 CFR Chapter 1 Subchapter J) as administered by the Center for Device and Radiological Health. Purchaser acknowledges that their products must comply with these regulations before they can be sold to an end-user.



Notice

nLight continually improves its products to provide our customers with outstanding quality and reliability. nLIGHT may make changes to specifications and product descriptions at any time, without notice. In addition, nLIGHT offers a limited warranty to ensure customer satisfaction. For complete details, please check with your nLIGHT sales representative.



nLIGHT Corporation
 5408 NE 88th Street, Bldg E
 Vancouver, Washington 98565
 United States of America
 Phone: 866.202.4488
 360.566.4460
 Fax: 360.546.1960
 E-mail: sales@nlight.net
 Web: www.nlight.net